



LED
INSIDE

ULISSE

design Luce Lab

Apparecchio di illuminazione a LED a soffitto per interni, dal design minimale caratterizzato da sezione tubolare tonda di diametro 80mm, in metallo verniciato bianco. Su richiesta per forniture contract sono realizzabili finiture speciali.

L'apparecchio è disponibile in quattro versioni:

- con modulo LED, alimentatore incluso, 230Vca e vetrino diffusore (flusso luminoso 800 lm) o ottica ad apertura fascio 27° (flusso luminoso 700 lm).

- con modulo LED, alimentatore escluso, 500mA e vetrino diffusore (flusso luminoso 1100 lm) o 700mA con ottica ad apertura fascio 27° (flusso luminoso 700 lm).

Disponibile in due temperature colore 3000K e 4000K.

Ceiling LED fitting for indoor, minimalist design with 80 round section tube, in white metal painted. On request for contract supplies, special finishings can be customized.



Available in four versions:

- with LED module, driver included, 230Vac and frosted glass (800 lm luminous flux) or 27° lens (700 lm luminous flux).

- with LED module, driver not included, 500mA and frosted glass (1100 lm luminous flux) or 700mA 27° lens (700 lm luminous flux).

Available in two different colour temperatures: 3000K and 4000K.

ULISSE



LED module 6 CREE XT-E 9W 230Vac

IP40 Classe 1 **A+**

Alimentatore 350mA incluso / 350mA Power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE
T009 LB	01 XX*	A Frosted Glass	K3 3000K 650lm
T009 LB	01 XX*	A Frosted Glass	K4 4000K 800lm

LED module 6 CREE XT-E 9W 500mA

IP40 **A+**

Alimentatore non incluso / Power supply not included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE
T009 LA	01 XX*	A Frosted Glass	K3 3000K 900lm
T009 LA	01 XX*	A Frosted Glass	K4 4000K 1100lm

LED module 3 CREE XT-E 9W 230Vac

IP20 Classe 1 **A+**

Alimentatore 700mA incluso / 700mA Power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE
T009 LB	01 XX*	M Lens 27°	K3 3000K 600lm
T009 LB	01 XX*	M Lens 27°	K4 4000K 700lm


LED module 3 CREE XT-E 8W 700mA

IP20 **A+**


Alimentatore non incluso / Power supply not included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE
T009 LA	01 XX*	M Lens 27°	K3 3000K 600lm
T009 LA	01 XX*	M Lens 27°	K4 4000K 700lm


PHOTOMETRICS

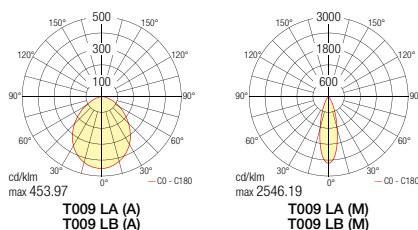

ACCESSORIES



TE079 Driver 500mA 12W
TE049 Driver 500mA 25W
pag. 294



TE052 Driver 700mA 8W
TE072 Driver 700mA 20W
pag. 294

* Finiture su richiesta / On request finishings