



SOSPENSIONE
SUSPENSION



Pag. 236

ULISSE G

design Luce Lab

Sospensione a LED per interni, dal design minimale caratterizzato da sezione tubolare tonda di diametro 120mm, in metallo verniciato bianco, grigio, nero e in cromo lucido o spazzolato. Su richiesta per forniture contract sono realizzabili finiture speciali.

Predisposta con sistema di bilanciamento per cavetti d'acciaio a regolazione automatica. L'apparecchio è disponibile in due versioni:

- con modulo LED, alimentatore incluso, 230Vca e vetrino diffusore satinato (flusso luminoso 2100 lm)

- con moduli LED, alimentatore incluso, 230Vca e ottica ad apertura fascio 27° (flusso luminoso 2100 lm).

Disponibile accessorio in vetro trasparente.

Disponibile in due temperature colore 3000K e 4000K.

LED suspension for indoors, minimalist design with 120 round section tube. Available in metal painted white, black, grey and in polished or brushed chrome. On request for contract supplies, special finishing can be customized. Arranged with a balancing system for automatic steel wires regulation. Appliance available in two versions:

-with LED module, driver included, 220Vac and frosted glass (2100 lm luminous flux)

-with LED modules, driver included, 220Vac and lens with optical beam angle 27° (2100 lm luminous flux)


Transparent glass is available as accessory.

Available in two different colour temperatures: 3000K and 4000K.



LED
INSIDE

ULISSE G

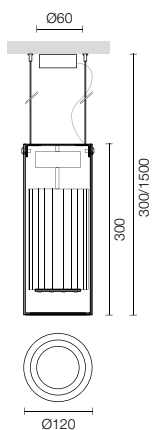

LED module 9 CREE XT-E 25W 230Vac

IP40 Classe 1 **A+**

Alimentatore 700mA incluso / 700mA power supply included


| CODE | FINISHINGS | LIGHT BEAM | COLOUR TEMPERATURE |
|----------------|---------------------------------------|------------------------|------------------------|
| T012 LE | 01 02 03 04 05 06* DA* DO* RA* | A Frosted Glass | K3 3000K 1750lm |
| T012 LE | 01 02 03 04 05 06* DA* DO* RA* | A Frosted Glass | K4 4000K 2100lm |

3 x LED module 3 CREE XT-E 25W 230Vac


IP20 Classe 1 **A+**

Alimentatore 700mA incluso / 700mA power supply included

| CODE | FINISHINGS | LIGHT BEAM | COLOUR TEMPERATURE |
|----------------|---------------------------------------|-------------------|------------------------|
| T012 LE | 01 02 03 04 05 06* DA* DO* RA* | M Lens 27° | K3 3000K 1750lm |
| T012 LE | 01 02 03 04 05 06* DA* DO* RA* | M Lens 27° | K4 4000K 2100lm |

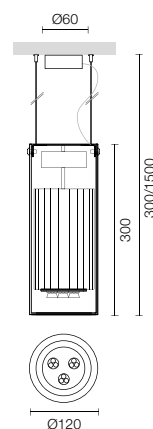

PHOTOMETRICS

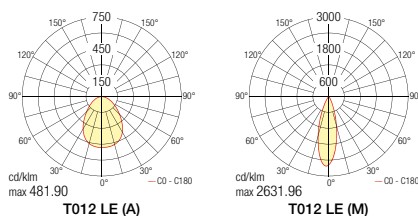

ACCESSORIES



TA002 60
Vetro trasparente
Transparent glass

* Finiture su richiesta / On request finishings