




## DIAPSON 4L COINLIGHT

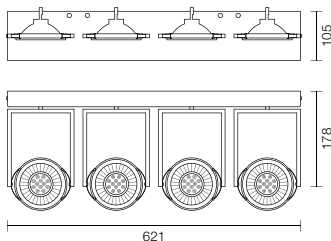

4 x 22,5W (104W\*) 230Vac COINLIGHT (inclusa/included)

IP20 IP23 Classe 1 **A** CE  
Alimentatore 700mA incluso / 700mA power supply included


CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE
<b>T020 LE</b>	<b>01 04</b>	<b>M</b> Lens 24°	<b>K3</b> 3000K 1740lm x 4 (7705 cd)
<b>T020 LE</b>	<b>01 04</b>	<b>W</b> Lens 40°	<b>K3</b> 3000K 1740lm x 4 (3570 cd)
<b>T020 LE</b>	<b>01 04</b>	<b>M</b> Lens 24°	<b>K4</b> 4000K 1850lm x 4 (8155 cd)
<b>T020 LE</b>	<b>01 04</b>	<b>W</b> Lens 40°	<b>K4</b> 4000K 1850lm x 4 (3780 cd)

4 x 33,8W (156W\*) 230Vac COINLIGHT (inclusa/included)


IP20 IP23 Classe 1 **A** CE  
Alimentatore 1050mA incluso / 1050mA power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE
<b>T020 LM</b>	<b>01 04</b>	<b>M</b> Lens 24°	<b>K3</b> 3000K 2550lm x 4 (11230 cd)
<b>T020 LM</b>	<b>01 04</b>	<b>W</b> Lens 40°	<b>K3</b> 3000K 2550lm x 4 (5200 cd)
<b>T020 LM</b>	<b>01 04</b>	<b>M</b> Lens 24°	<b>K4</b> 4000K 2700lm x 4 (11885 cd)
<b>T020 LM</b>	<b>01 04</b>	<b>W</b> Lens 40°	<b>K4</b> 4000K 2700lm x 4 (5505 cd)

### PHOTOMETRICS




### ACCESSORIES



Kit screen  
**TA027 01**  
Bianco/White

## DIAPSON 6L COINLIGHT

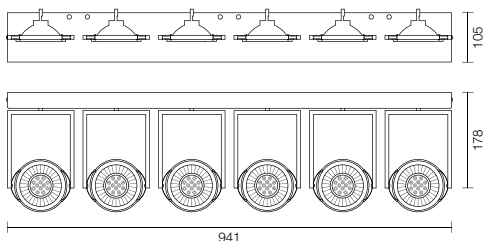

6 x 22,5W (156W\*) 230Vac COINLIGHT (inclusa/included)

IP20 IP23 Classe 1 **A** CE  
Alimentatore 700mA incluso / 700mA power supply included


CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE
<b>T020 LF</b>	<b>01 04</b>	<b>M</b> Lens 24°	<b>K3</b> 3000K 1740lm x 6 (7705 cd)
<b>T020 LF</b>	<b>01 04</b>	<b>W</b> Lens 40°	<b>K3</b> 3000K 1740lm x 6 (3570 cd)
<b>T020 LF</b>	<b>01 04</b>	<b>M</b> Lens 24°	<b>K4</b> 4000K 1850lm x 6 (8155 cd)
<b>T020 LF</b>	<b>01 04</b>	<b>W</b> Lens 40°	<b>K4</b> 4000K 1850lm x 6 (3780 cd)

6 x 33,8W (234W\*) 230Vac COINLIGHT (inclusa/included)


IP20 IP23 Classe 1 **A** CE  
Alimentatore 1050mA incluso / 1050mA power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE
<b>T020 LN</b>	<b>01 04</b>	<b>M</b> Lens 24°	<b>K3</b> 3000K 2550lm x 6 (11230 cd)
<b>T020 LN</b>	<b>01 04</b>	<b>W</b> Lens 40°	<b>K3</b> 3000K 2550lm x 6 (5200 cd)
<b>T020 LN</b>	<b>01 04</b>	<b>M</b> Lens 24°	<b>K4</b> 4000K 2700lm x 6 (11885 cd)
<b>T020 LN</b>	<b>01 04</b>	<b>W</b> Lens 40°	<b>K4</b> 4000K 2700lm x 6 (5505 cd)

### PHOTOMETRICS



### ACCESSORIES



Kit screen  
**TA028 01**  
Bianco/White

\* Potenza totale assorbita dal corpo illuminante / Total absorbed power by the lighting fixture