


DIAPSON 4L LUNGO FRAMELESS COINLIGHT



628x158

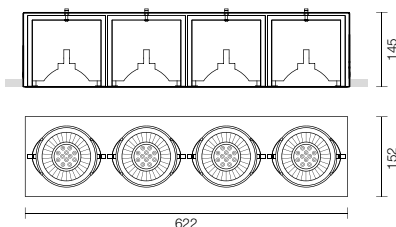

4 x 22,5W (104W*) 230Vac COINLIGHT (inclusa/included)

IP20 IP23 Classe 1 **A** CE
Alimentatore 700mA incluso / 700mA power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE	APPLICATION
T032 LD	01 02 03	M Lens 24°	K3 3000K 1740lm x 4 (7705 cd)	Cartongesso/Plasterboard
T032 LD	01 02 03	W Lens 40°	K3 3000K 1740lm x 4 (3570 cd)	Cartongesso/Plasterboard
T032 LD	01 02 03	M Lens 24°	K4 4000K 1850lm x 4 (8155 cd)	Cartongesso/Plasterboard
T032 LD	01 02 03	W Lens 40°	K4 4000K 1850lm x 4 (3780 cd)	Cartongesso/Plasterboard

4 x 33,8W (156W*) 230Vac COINLIGHT (inclusa/included)


IP20 IP23 Classe 1 **A** CE
Alimentatore 1050mA incluso / 1050mA power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE	APPLICATION
T032 LI	01 02 03	M Lens 24°	K3 3000K 2550lm x 4 (11230 cd)	Cartongesso/Plasterboard
T032 LI	01 02 03	W Lens 40°	K3 3000K 2550lm x 4 (5200 cd)	Cartongesso/Plasterboard
T032 LI	01 02 03	M Lens 24°	K4 4000K 2700lm x 4 (11885 cd)	Cartongesso/Plasterboard
T032 LI	01 02 03	W Lens 40°	K4 4000K 2700lm x 4 (5505 cd)	Cartongesso/Plasterboard

DIAPSON 4L QUADRO FRAMELESS COINLIGHT



318x318



4 x 22,5W (104W*) 230Vac COINLIGHT (inclusa/included)

IP20 IP23 Classe 1 **A** CE
Alimentatore 700mA incluso / 700mA power supply included


CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE	APPLICATION
T032 LC	01 02 03	M Lens 24°	K3 3000K 1740lm x 4 (7705 cd)	Cartongesso/Plasterboard
T032 LC	01 02 03	W Lens 40°	K3 3000K 1740lm x 4 (3570 cd)	Cartongesso/Plasterboard
T032 LC	01 02 03	M Lens 24°	K4 4000K 1850lm x 4 (8155 cd)	Cartongesso/Plasterboard
T032 LC	01 02 03	W Lens 40°	K4 4000K 1850lm x 4 (3780 cd)	Cartongesso/Plasterboard

4 x 33,8W (156W*) 230Vac COINLIGHT (inclusa/included)


IP20 IP23 Classe 1 **A** CE
Alimentatore 1050mA incluso / 1050mA power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE	APPLICATION
T032 LH	01 02 03	M Lens 24°	K3 3000K 2550lm x 4 (11230 cd)	Cartongesso/Plasterboard
T032 LH	01 02 03	W Lens 40°	K3 3000K 2550lm x 4 (5200 cd)	Cartongesso/Plasterboard
T032 LH	01 02 03	M Lens 24°	K4 4000K 2700lm x 4 (11885 cd)	Cartongesso/Plasterboard
T032 LH	01 02 03	W Lens 40°	K4 4000K 2700lm x 4 (5505 cd)	Cartongesso/Plasterboard

PHOTOMETRICS




ACCESSORIES



Telaio Plasterkit per cartongesso incluso
Plasterkit frame for plasterboard included



Kit estraibile 1 luce per massima orientabilità del gruppo ottico
Up & Down Kit for full extension and orientation of the optical unit
TA017 01 Bianco / White
TA017 02 Grigio / Grey
TA017 03 Nero / Black
pag. 188



DRIVER
Uno per Coinlight, incluso
One for each Coinlight, included
22,5W - 68 x 140 x h 30 mm
33,8W - 68 x 140 x h 30 mm