


DIAPSON 4L LUNGO COINLIGHT



625x160

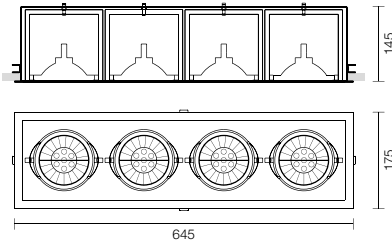

4 x 22,5W (104W**) 230Vac COINLIGHT (inclusa/included)

IP20 IP23 Classe 1 **A** CE

Alimentatore 700mA incluso / 700mA power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE	APPLICATION
T030 LD	01 02 03 04 05 DA* DO* RA*	M Lens 24°	K3 3000K 1740lm x 4 (7705 cd)	Cartongesso/Plasterboard
T030 LD	01 02 03 04 05 DA* DO* RA*	W Lens 40°	K3 3000K 1740lm x 4 (3570 cd)	Cartongesso/Plasterboard
T030 LD	01 02 03 04 05 DA* DO* RA*	M Lens 24°	K4 4000K 1850lm x 4 (8155 cd)	Cartongesso/Plasterboard
T030 LD	01 02 03 04 05 DA* DO* RA*	W Lens 40°	K4 4000K 1850lm x 4 (3780 cd)	Cartongesso/Plasterboard

4 x 33,8W (156W**) 230Vac COINLIGHT (inclusa/included)

IP20 IP23 Classe 1 **A** CE


Alimentatore 1050mA incluso / 1050mA power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE	APPLICATION
T030 LI	01 02 03 04 05 DA* DO* RA*	M Lens 24°	K3 3000K 2550lm x 4 (11230 cd)	Cartongesso/Plasterboard
T030 LI	01 02 03 04 05 DA* DO* RA*	W Lens 40°	K3 3000K 2550lm x 4 (5200 cd)	Cartongesso/Plasterboard
T030 LI	01 02 03 04 05 DA* DO* RA*	M Lens 24°	K4 4000K 2700lm x 4 (11885 cd)	Cartongesso/Plasterboard
T030 LI	01 02 03 04 05 DA* DO* RA*	W Lens 40°	K4 4000K 2700lm x 4 (5505 cd)	Cartongesso/Plasterboard

DIAPSON 4L QUADRO COINLIGHT



320x320



4 x 22,5W (104W**) 230Vac COINLIGHT (inclusa/included)

IP20 IP23 Classe 1 **A** CE

Alimentatore 700mA incluso / 700mA power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE	APPLICATION
T030 LC	01 02 03 04 05 DA* DO* RA*	M Lens 24°	K3 3000K 1740lm x 4 (7705 cd)	Cartongesso/Plasterboard
T030 LC	01 02 03 04 05 DA* DO* RA*	W Lens 40°	K3 3000K 1740lm x 4 (3570 cd)	Cartongesso/Plasterboard
T030 LC	01 02 03 04 05 DA* DO* RA*	M Lens 24°	K4 4000K 1850lm x 4 (8155 cd)	Cartongesso/Plasterboard
T030 LC	01 02 03 04 05 DA* DO* RA*	W Lens 40°	K4 4000K 1850lm x 4 (3780 cd)	Cartongesso/Plasterboard


4 x 33,8W (156W**) 230Vac COINLIGHT (inclusa/included)

IP20 IP23 Classe 1 **A** CE


Alimentatore 1050mA incluso / 1050mA power supply included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE	APPLICATION
T030 LH	01 02 03 04 05 DA* DO* RA*	M Lens 24°	K3 3000K 2550lm x 4 (11230 cd)	Cartongesso/Plasterboard
T030 LH	01 02 03 04 05 DA* DO* RA*	W Lens 40°	K3 3000K 2550lm x 4 (5200 cd)	Cartongesso/Plasterboard
T030 LH	01 02 03 04 05 DA* DO* RA*	M Lens 24°	K4 4000K 2700lm x 4 (11885 cd)	Cartongesso/Plasterboard
T030 LH	01 02 03 04 05 DA* DO* RA*	W Lens 40°	K4 4000K 2700lm x 4 (5505 cd)	Cartongesso/Plasterboard

PHOTOMETRICS



ACCESSORIES



Kit estraibile 1 luce per massima orientabilità del gruppo ottico
Up & Down Kit for full extension and orientation of the optical unit


TA017 01 Bianco / White

TA017 02 Grigio / Grey

TA017 03 Nero / Black

TA017 04 Cromo / Chrome

pag. 188



DRIVER

Uno per Coinlight, incluso
One for each Coinlight, included
22,5W - 68 x 140 x h 30 mm
33,8W - 68 x 140 x h 30 mm