



INCASSI DA INTERNO
INDOOR RECESSED LIGHT

ALFA - MINIALFA

design Luce Lab

Corpo illuminante da incasso a luce diretta, da soffitto o parete, con cornice a sezione tonda Ø100mm e Ø70mm. In metallo interamente verniciato bianco, nero, grigio e in cromo lucido o spazzolato con interno grigio. Disponibile, su richiesta, la versione con cornice in foglia oro, argento o rame.

Utilizzabile su cartongesso o su laterizio con apposita cassaforma. L'apparecchio monta un modulo a tre LED CREE XT-E ed è disponibile in due temperature colore 3000K o 4000K.

Disponibile in due versioni: con vetrino diffusore sabbiato o ottica ad apertura fascio 27°.

Recessed spotlight with direct light, both for ceiling and wall, with a round section frame Ø100mm and Ø70mm. Metal painted entirely white, black, grey and in polished or brushed chrome with grey inside. On request, available frame in gold, silver or copper leaf.


For plasterboard or brick wall with proper recessed box.

The unit is equipped with a three CREE XT-E LED module which is available in two colour temperatures: 3000K and 4000K.

Available in two versions: with frosted glass or lens with optical beam angle 27°.

ALFA

Ø 95

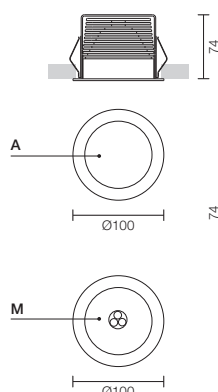


LED module 3 CREE XT-E 8W 700mA

IP40 IP43 F I A+ CE


Alimentatore non incluso / Power supply not included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE
T010 LA	01 02 03 04 05 DA* DO* RA*	A Frosted Glass	K3 3000K 580lm
T010 LA	01 02 03 04 05 DA* DO* RA*	A Frosted Glass	K4 4000K 700lm
T010 LA	01 02 03 04 05 DA* DO* RA*	M Lens 27°	K3 3000K 580lm
T010 LA	01 02 03 04 05 DA* DO* RA*	M Lens 27°	K4 4000K 700lm


PHOTOMETRICS

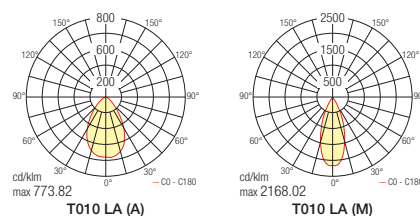

ACCESSORIES




TC008
Casaforma
Recessed box



TE052 Driver 700mA 8W
TE073 Driver 700mA 35W
pag. 214

MINIALFA

Ø 65

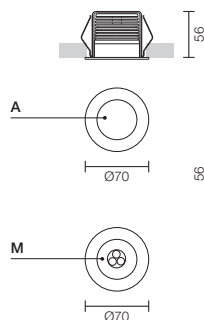


LED module 3 CREE XT-E 4W 350mA

IP40 IP43 F I A++ CE


Alimentatore non incluso / Power supply not included

CODE	FINISHINGS	LIGHT BEAM	COLOUR TEMPERATURE
T010 LB	01 02 03 04 05 DA* DO* RA*	A Frosted Glass	K3 3000K 330lm
T010 LB	01 02 03 04 05 DA* DO* RA*	A Frosted Glass	K4 4000K 400lm
T010 LB	01 02 03 04 05 DA* DO* RA*	M Lens 27°	K3 3000K 330lm
T010 LB	01 02 03 04 05 DA* DO* RA*	M Lens 27°	K4 4000K 400lm


PHOTOMETRICS

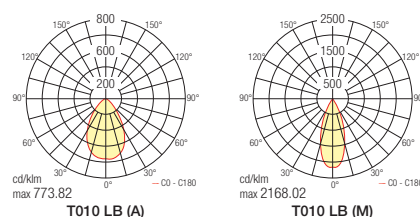

ACCESSORIES



TC007
Casaforma
Recessed box



TE063 Driver 350mA 4W
TE080 Driver 350mA 15W
pag. 214

* Finitures richiesta / On request finishings